

# BILLET GRILLE INSTRUCTIONS

**PN: R109964/ R109965**


**09-12 DODGE RAM (ST/SLT) 4PC UPPER**

## Hardware

8 -- "U" Tabs      8 -- Screws      8 -- nuts

**NOTE:** Be Careful not to scratch the grills Surface.

The picture for the hardware together with the grille:

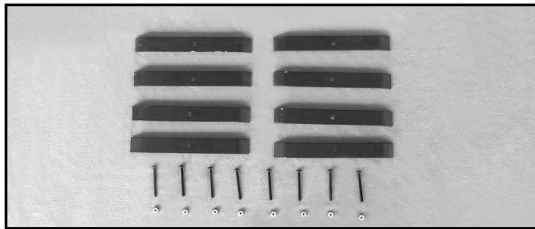

The step for grille's mounting:

- (1) Open the hood. Remove the 2 plastic radiator covers in front of the core support. Each cover has metal press-in clips securing them in place. Pull up on the covers to remove them. This will allow access to the rear of the grille.
- (2) Test fit the billet sections to the grille. Insert screws into the mounting tabs on the grilles. Make the U tabs at the rear of the grille. Start to thread the U tabs onto the screws, and make the lock nuts threaded a little at the end of the screws from the rear of grille too. Center one of the lower billets on the grille. Pull the flange brackets through the plastic bars on the factory grille. Use a screwdriver to tighten the hardware, after making the lock nut steady at the screw end. Repeat the process for each billet section.
- (3) Make sure the billets are centered. Loosen the hardware and adjust the billets if needed. Re-fasten the plastic radiator covers onto the vehicle.
- (4) The installation is complete now!

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. We are not responsible for any damage caused by the installation. Thank you for choosing our product!