20015-2017 Ford F150


Wire Mesh Replacement Grille w/Frame - Black Stainless



Step 1\\
Using a panel removal tool, remove the (12) push clips holding the plastic radiator cover to the grille.



Step 2Remove the (4) 8mm bolts holding the top of the grille to the radiator support.

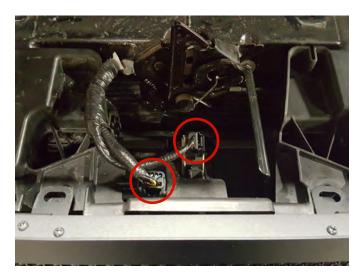

Step 3Unplug the (2) wire connections by the hood latch.



Step 4Carefully pull back on the headlight trim, and remove the (2) 8mm bolts holding the grille in.

20015-2017 Ford F150


Wire Mesh Replacement Grille w/Frame - Black Stainless



Step 5With a panel removal tool, remove the (6) push clips holding the side cover in place. Then remove the grille completely from the vehicle.



Step 6\\
Remove the factory grille by removing the (4) push clips on the top, and (2) 8mm screws on the bottom. Install the new replacement grille to the grille frame by using the factory hardware.

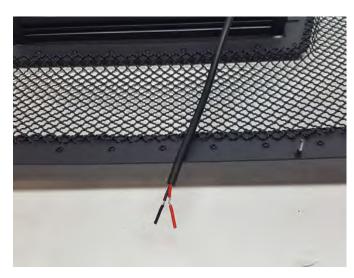

Step 7Optional LED Wiring Diagram:
Red- Switch ignition 12Volt
Black- Chassis Ground



Step 8Reinstall the grille by reversing the steps.