

Bug Deflector Install Guide

(15-19) F150




Step 1//

Begin by opening the hood and removing the (4) factory weatherstripping push pins.



Step 2//

Install the metal clips onto the Bug Deflector using the supplied washer and machine screw. These clips clamp outer edges of the Bug Deflector to the hood. ****Note:** The vinyl squares will be used between the paint and the clip to protect the paint from damage.

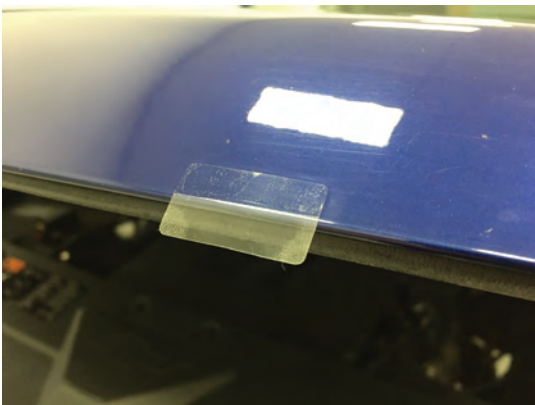

Step 3//

Before installing the Bug Deflector, align the mounting holes and line up the vinyl squares with the metal clips. Place the supplied vinyl squares on the hood surface where the metal clips secure the outer edges of the Bug Deflector. Fold the square around to the backside to protect the paint on the top and bottom of the hood.

Contents:

- (1) Bug Deflector
- (2) Machine Screws
- (2) Metal Clips
- (2) Clear Vinyl Squares
- (4) Plastic Push Pins
- (2) Washers
- (4) Rubber Bumpers
- (1) Prep Pad

Tools Required:

- Panel Removal Tool
- Flat Screw Driver
- Phillips Head Screw Driver



Step 4//

With the factory weatherstripping push pins removed, sandwich the Bug Deflector between the weather stripping and the hood. Install the (4) supplied push pins. ****Note:** These are a tight fit and will require you to apply firm pressure on the supplied push pin to insure they are pin catches the weather stripping, Bug Deflector, and the hood.



Step 5//

With the center mounted, press the metal clip onto to hood. ****Note:** The metal clips may need to be "opened" up a little bit for better fitment. They should be a snug fit, but they shouldn't have to be forced onto the hood. Open and close the clip as need for best fit.



Step 6//

Finish the installation by installing the supplied rubber bumpers to protect the paint anywhere the Bug Deflector may make contact with the hood.