

# Center Console Storage Lock Vault (15-19 F150)

## Contents:

- (1) Center Console Vault
- (1) Mounting Bracket
- (4) M6x1.0x40mm Bolts
- (4) M6 Lock Washers
- (4) M6 Flat Washers
- (2) Foam Pads

## Tools Required:

- 7mm, 10mm Sockets
- 1/4" or 3/8" Ratchet and Extensions
- Drill & 3/8" Drill Bit
- Pry Bar
- Vacuum
- Small Pin



### Step 1

Begin by carefully pulling up to release the rear cup holders located on the center console.



### Step 2

Locate, and remove the (2) 7mm screws securing the rear center console cover.



### Step 3

Gently pull the rear center console cover away from the center console. Carefully unplug all connections, and remove the cover.



### Step 4

Slide both front seats all the way forward to gain access to the (1) 10mm bolt on each side of the lower center console. Remove the bolts.



### Step 5

Carefully slide the center console vault into the center console. Make sure its seated all the way into the center console.



### Step 6

Using a 3/8" drill bit and drill, carefully drill the (4) mounting hole locations. Vacuum any debris left from drilling.



### Step 7

Carefully insert a pry bar in-between the rear of the center console pry upward to raise the center console. While the center console is raised, insert the mounting plate in-between the metal bracket and center console fins.




### Step 8

Align the drilled hole locations with the metal bracket plate underneath the console and secure the vault using the (4) M6x1.0x40mm bolts, lock washers, and flat washers.



### Step 9

Insert a foam pad to cover the mounting bolts.

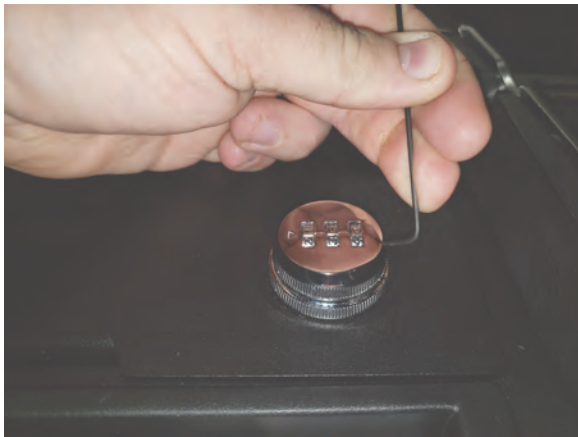

### Step 10

The lock is preset to 000. To change the combination, turn the knob so the vault is unlocked. Insert a small pin in the hole on the knob while the knob is unlocked. This will not work if the vault is in the lock position. While the pin is inserted in the hole, change the combination to a desired combination then release the pin. Test for proper function. Installation is now complete.