

04-08 F150 Raptor Style Grille

Electrical

TOOLS NEEDED FOR INSTALLATION
10mm Socket Wrench
Phillips Screw Driver

KIT INCLUDES:
Packaged Grille
Wiring Harness
2 Mounting Brackets

- The grille comes complete with LED amber lights which need to be connected to a power source. If you are not qualified to make the proper connections, we highly recommend that you contact an installation expert to complete the connections. The hardware kit comes complete with a wiring harness. This harness can be used to connect the LED amber lights to your power supply. They are included for your convenience but your specific installation may require additional wiring and other components not supplied in our hardware kit.

Removal of OEM Grille

Step 1. Removal of OEM grille

- Open the hood and using a 10mm socket, remove the 2 bolts holding the factory grille shell brackets to the hood. **Fig 1**
- Remove the 6 factory 10mm nuts along the top of the grille shell that attaches to the hood. **Fig 1**
- Remove the last two 10mm bolts from the mounting bracket on both sides of grille. **Fig 2**
- Carefully remove shell from vehicle and move to workbench.

Step 2. Workbench Work

- Locate the supplied mounting brackets and determine passenger and driver side.
- Using provided sheet metal screws, attach mounting brackets to their respective sides. **Fig 3 & Fig 4**

FIG 1

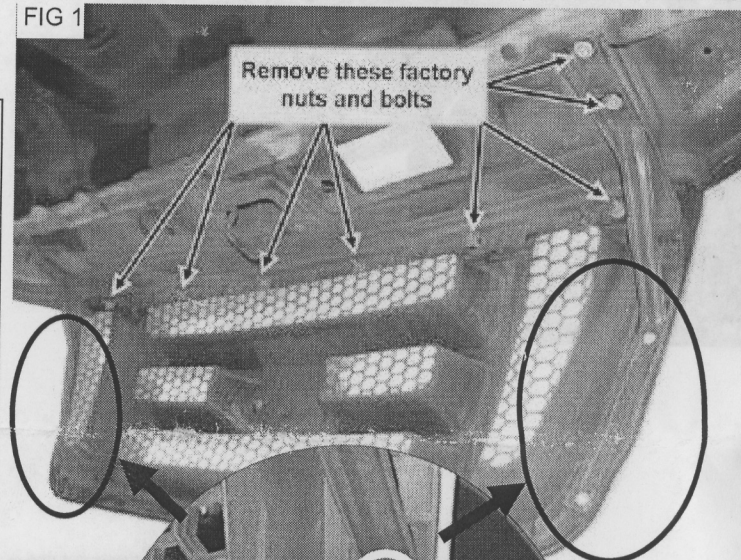


FIG 3

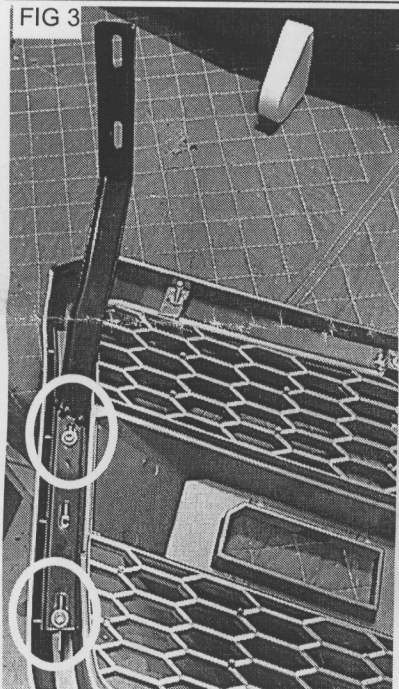


FIG 4


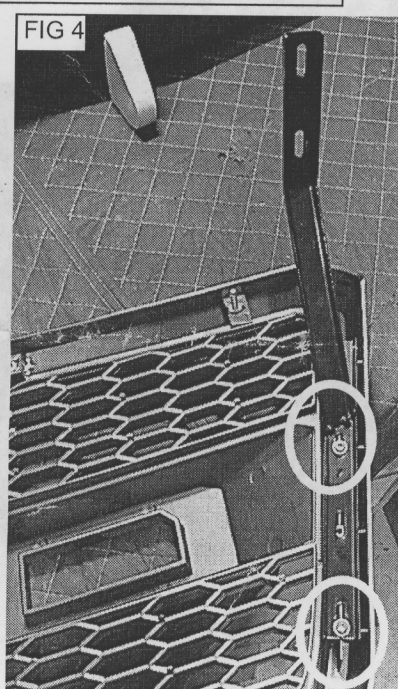


FIG 2

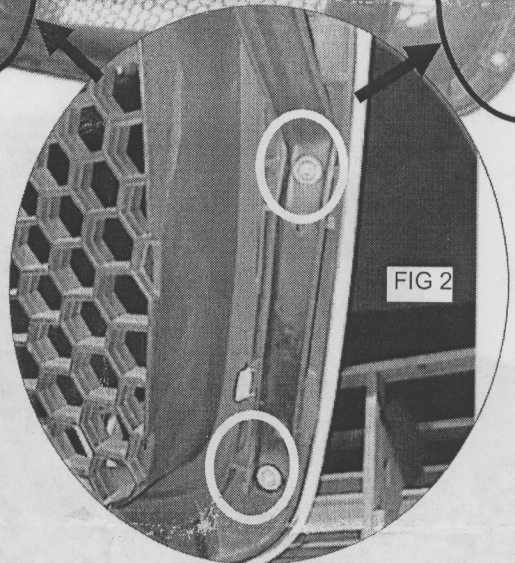

Installation of New Grille

Step 1. Installation of New Grille

- Carefully position grille onto hood and insert the threaded studs on the grille through the factory holes in the hood. **Fig 5**
- Secure the grille using OEM hardware. **Fig 6**
- This completes the installation process.

