



## 15-16 F150 Raptor Style Grille

### PRIOR TO INSTALLATION

- Read these instructions and make sure kit is complete before beginning the installation.

### TOOLS NEEDED FOR INSTALLATION

Ratchet  
10mm Socket  
8mm Socket  
Plastic Clip Remover

### KIT INCLUDES:

Packaged Grille  
Wiring Harness



### Electrical


- The grille comes complete with LED amber lights which need to be connected to a power source. If you are not qualified to make the proper connections, we highly recommend that you contact an installation expert to complete the connections. The hardware kit comes complete with a wiring harness. This harness can be used to connect the LED amber lights to your power supply. They are included for your convenience but your specific installation may require additional wiring and other components not supplied in our hardware kit.

### Removal of OEM Grille

#### Step 1. Removal of OEM grille

- Pop hood and using a plastic clip remover remove 9 plastic clips holding on shroud. **Fig 1**
- Using plastic clip remover unclip the two plastic clips near the headlight (both sides). **Fig 2**
- Disconnect the 2 electrical clips near the hood latch release. **Fig 3**
- Using a 10mm socket remove the four 10mm bolts on the top of the grille. **Fig 4**
- Pull back the headlight framing to access the last 8mm bolt holding the grille on. **Fig 5**
- Remove grille and place onto workbench.
- Continued on Page 2.....

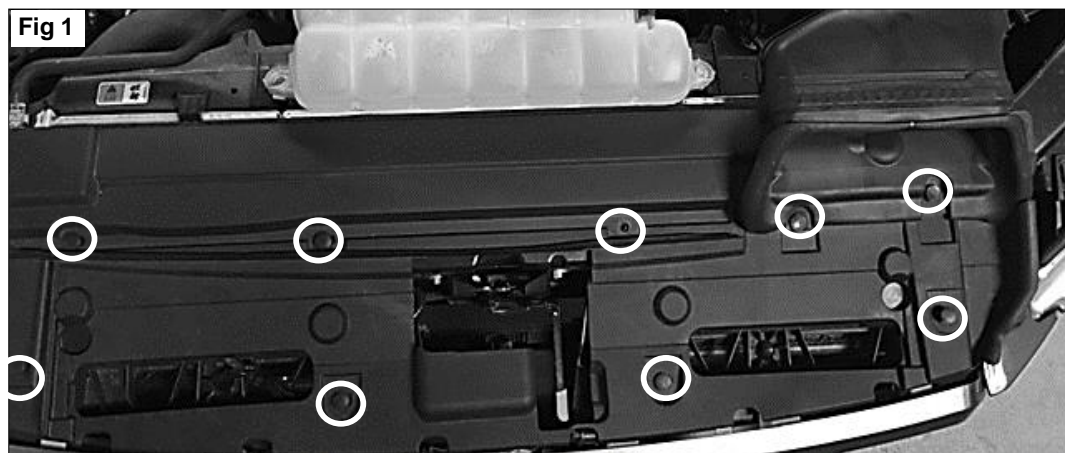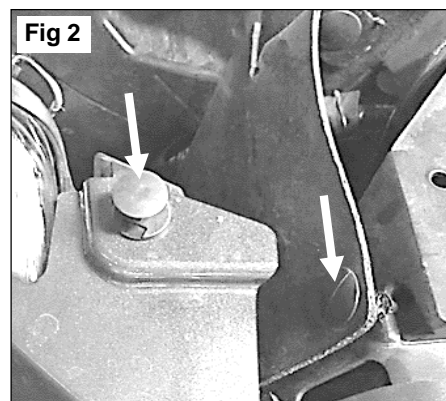

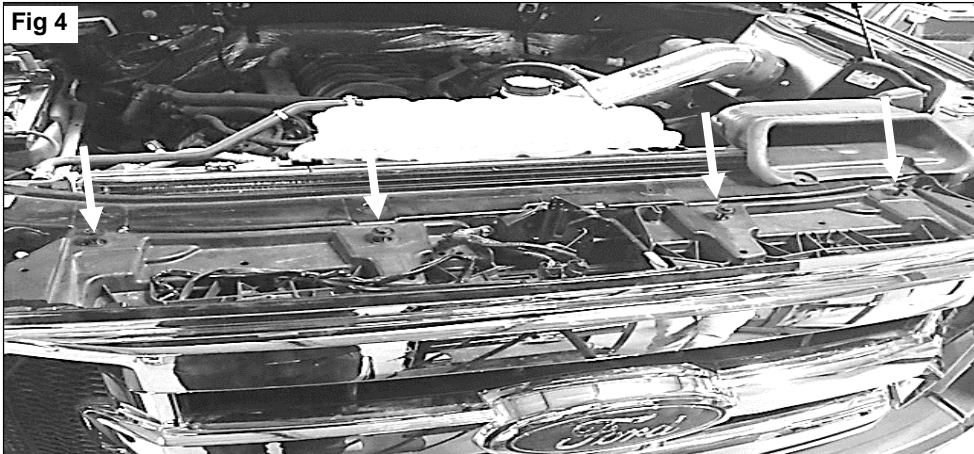

### Removal of OEM Grille Continued.....

#### Step 2. Workbench Work

- With the grille in a safe work area remove the five 10mm bolts from the bottom and sides. **Fig 6**
- Remove the 4 plastic clips holding the backing to the grille itself. **Fig 7**
- Once all plastic clips are removed lift grille off and replace with new grille. **Fig 8**

