

# Installation & CARE

**SPEC-D**  
*Tuning*







INNOVATE    PROFESSIONAL    SERVICE

## 2015 FORD F150 PROJECTOR HEADLIGHTS INSTALLATION

### BEFORE INSTALLATION


- If you experience any difficulties that the instruction did not cover, please seek assistance at local automotive shop.
- Please wear protection before you work on any vehicle.
- An assistant is useful when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

### TOOLS AND SUPPLIES REQUIRED


| Ratchet   | 7 mm socket   | 10 mm socket  | Flathead screwdriver  |
|---|---|---|---|
|   |  |  |  |
| 8 mm socket   | Plastic Pry bar   |   |   |
|  |  |   |   |
|   |   |   |   |
|   |   |   |   |
|   |   |   |   |
|   |   |   |   |
|   |   |   |   |

### PRODUCT NUMBER

2LHP-F15015JM-TM  
2LHP-F15015G-TM  
2LHP-F15015-TM

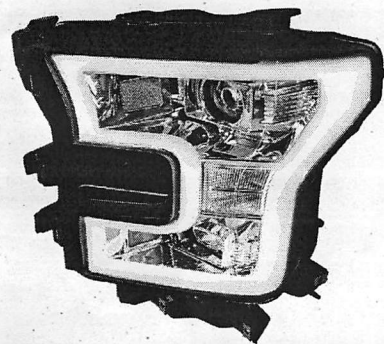


### LET'S START THE INSTALLATIONS

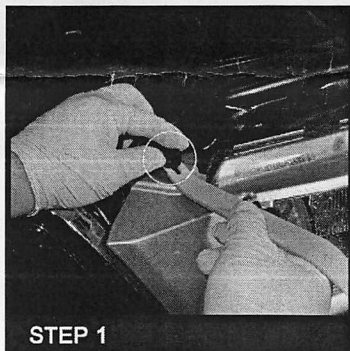


**STEP 1**

Remove the headlight trim fastener

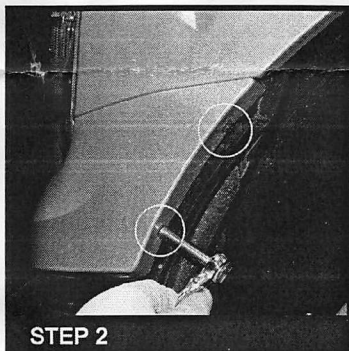


**STEP 2**

Remove (2) 7mm headlight trim bolts

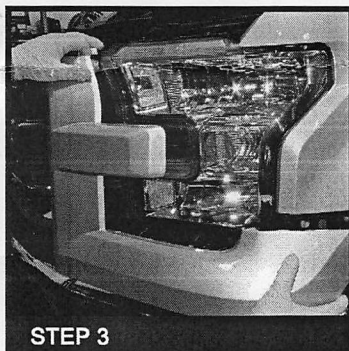


**STEP 3**

Remove the headlight trim

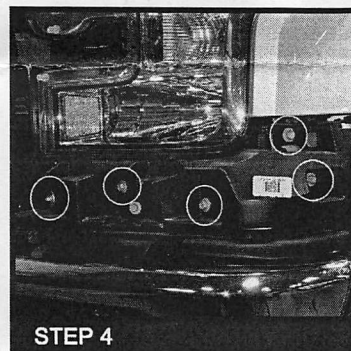


**STEP 4**

Remove (1) 8mm bolt and (5) 10mm headlight bracket bolts

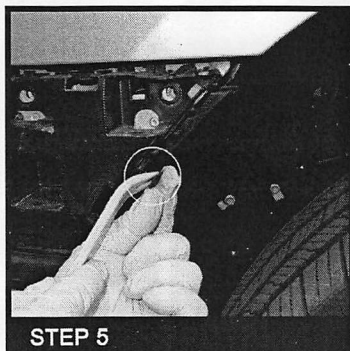


**STEP 5**

Remove the headlight bracket fastener in the wheel well

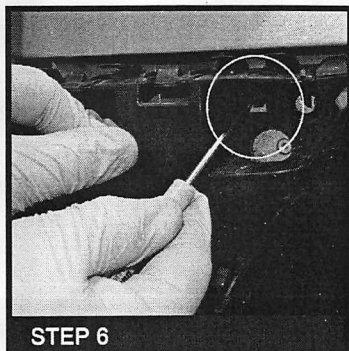


**STEP 6**

Press down retaining clip with flathead screwdriver to loosen bracket

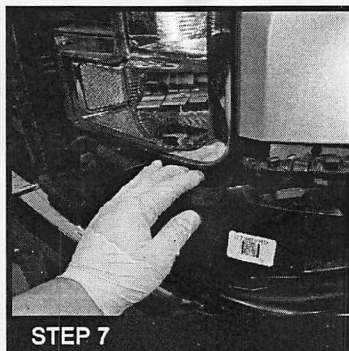

**STEP 7**


Gently pry and loosen headlight bracket

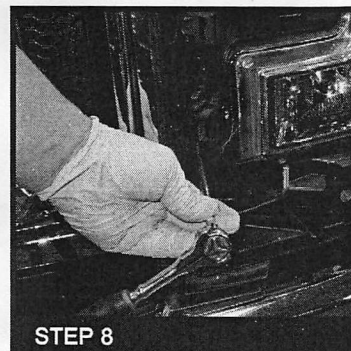

**STEP 8**

Remove (1) 10mm front headlight bolt deep behind grille



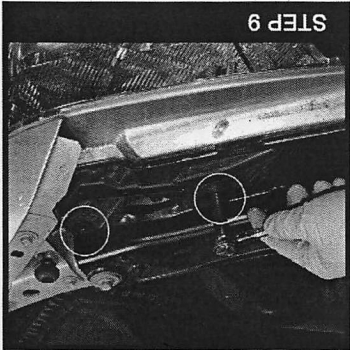


Remove (2) 10mm upper headlight bolts




Remove the headlight housing and disconnect the sockets and connectors




Remove the parking light socket

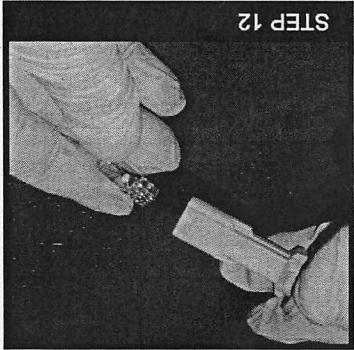

Remove the parking light bulb

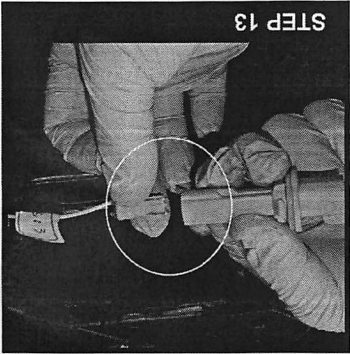


Attach the LED connector to the parking light socket

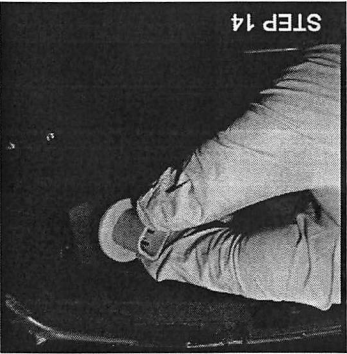


Secure the parking light socket onto LED headlights




Connect the main light connector to the projector headlight housing

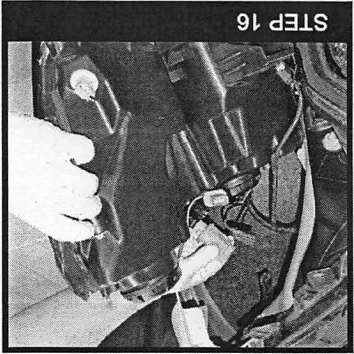


Secure all the connectors and sockets to the LED headlight housing

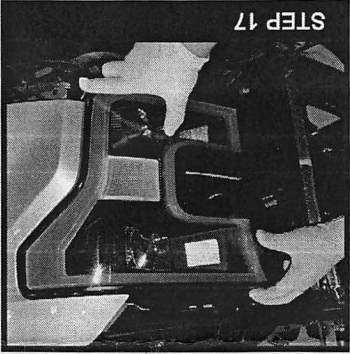


Secure the headlight housing

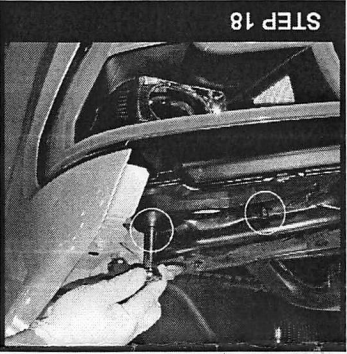


Reinstall (2) 10mm upper headlight bolts

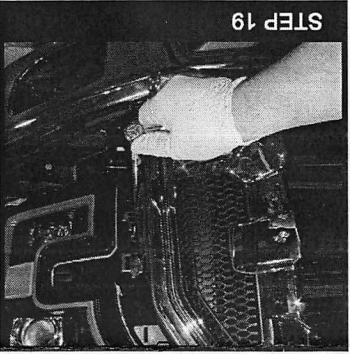


Reinstall (1) 10mm front headlight bolt deep behind grille

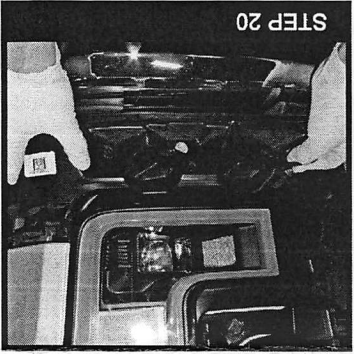

Secure the headlight bracket back into the original position

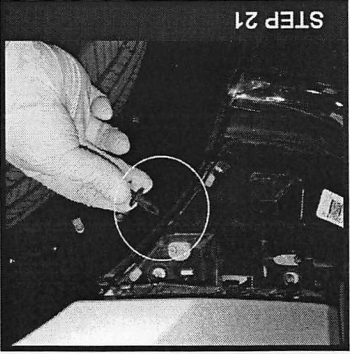


Secure the headlight bracket fastener

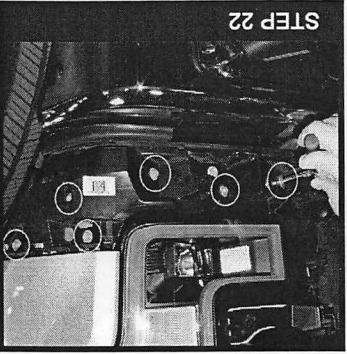

Reinstall (1) 8mm and (5) 10mm bracket bolts




Reinstall the headlight trim

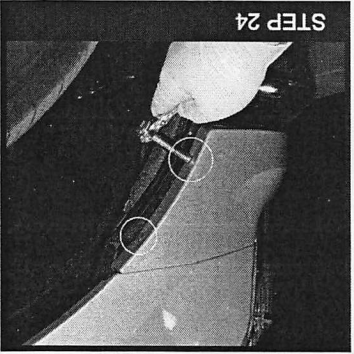

Reinstall (2) 7mm headlight trim bolts





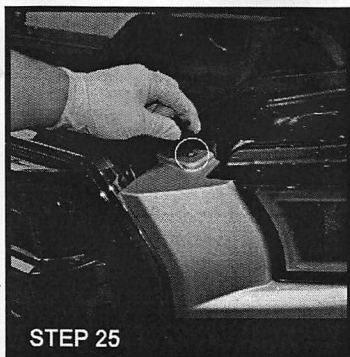

**STEP 25**

Secure the top headlight trim fastener



**STEP 26**

Please repeat the steps from 1 to 25 for the opposite side



The installation is now complete

