



09-14 F150 Raptor Style Grille w/o Lights

KIT INCLUDES

Raptor style grille

TOOLS NEEDED FOR INSTALLATION

10mm Wrench
T25 Torx Wrench
Plastic Prybar

OPTIONAL
Electric Screw gun with
#2 Phillips head bit

PRIOR TO INSTALLATION

- Make sure the kit is complete and you have read these instructions thoroughly before beginning installation.
- Ensure you have the correct grille for your truck before beginning the installation process.

Removing the OEM Grille

Step 1. Removal of OEM grille

- Cover the hood around the grille shell with masking tape to protect the finish of the hood when removing the factory grille shell and installing the Grille. **Fig 1**
- Open the hood and use a 10mm socket wrench to remove the (6) factory hex nuts from across the top of the factory grille shell. **Fig 2**
- Use a T-25 Torx wrench to remove the (6) screws from across the bottom of the factory grille shell. **Fig 3**
Save these screws for later use.
- Slightly pull on one of the top corners of the factory grille shell and carefully slide a plastic pry bar between shell and hood. **Fig 4**
- Carefully pull the shell away from the hood with pry bar. Start on one side and work your way across the opposite side of the grille shell, then remove grille shell from vehicle.

FIG 1



FIG 2

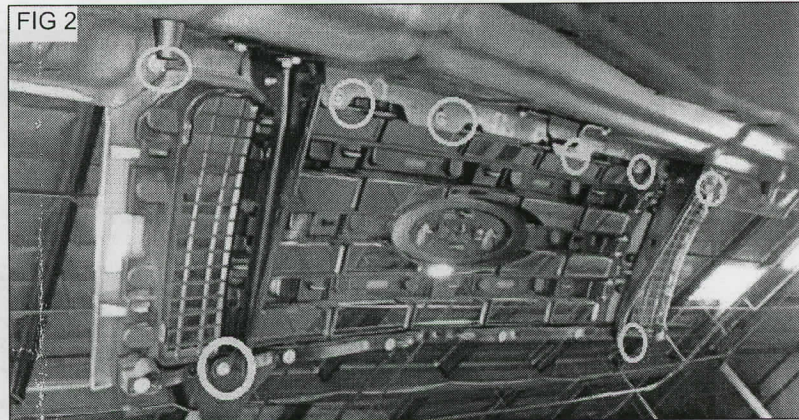


FIG 3

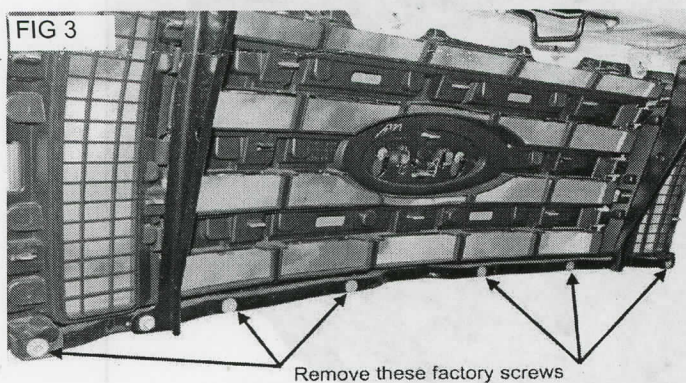


FIG 4

